


**Using quilted fabric for a project:** Cut out pieces of fabric, batting and lining (if desired) a few inches bigger all around each pattern piece (layer the materials with fabric on top of batting, and lining on bottom). Pattern pictured is for a coin purse.




Mark one beginning seam line on fabric, (usually through the center). Mark on the bias for diamond pattern. Mark on the straight grain for a square pattern.





Sew one seam of stitches on that line. Do not cut threads at the end of each line of stitching. At the end of the seam, leave the needle in the fabric, raise the presser foot, spin the fabric around, raise the needle all the way up, pull the fabric over to the next position, aligning the leg guide with a previous line of stitching, lower needle, lower presser foot and continue stitching.

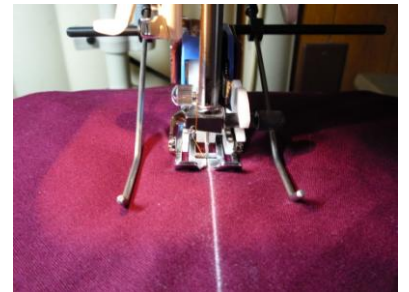

Sew all remaining seams using the leg of the attachment as a guide in the previously stitched seam.

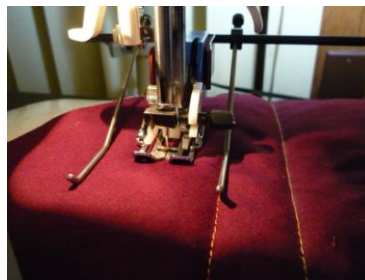

To sew intersecting lines, mark a beginning line and continue stitching.

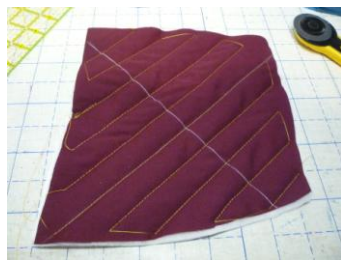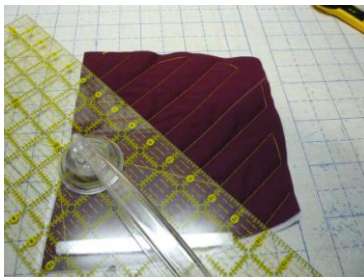



After quilting is complete (squares, diamonds, circles or parallel lines: straight or wavy) lay the pattern piece on the quilted fabric and cut out the pattern piece.



Sew the project together



Back looks as nice as front.  
Great for making turn back cuffs on jackets and under collars.

Use contrast thread in bobbin for a decorative look.  
If you want a separate lining, just leave the bottom layer off and sew with the batting on the underside.



Sample of quilted fabric used for a sewing machine cover.